



TIPO RLM

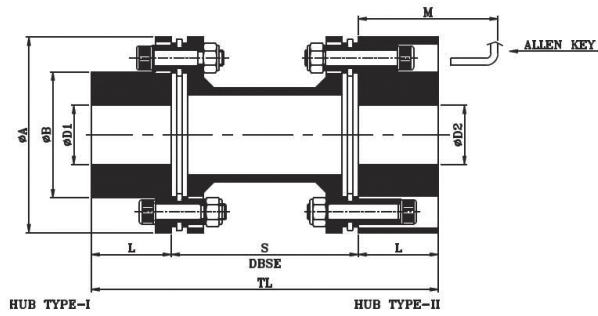

CUBO TIPO I

CUBO TIPO II

TIPO RLMK

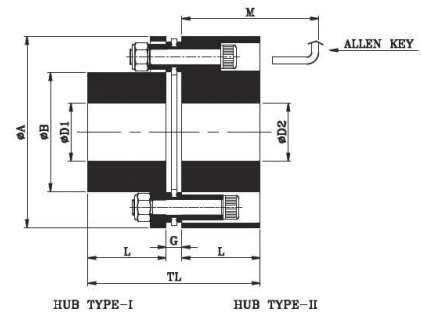

CUBO TIPO I

CUBO TIPO II

CARACTERÍSTICAS RLM

Tipo RLM	Par Nom. Nm	Max. RPM	Agujero			Min. DBSE "S"	ØA	ØB	L	STD DBSE "S"	TL (STD DBSE)	M	Peso kg. aprox.		M.I. (MR2) en kg. m ² aprox		Tors. stiff. MNm/rad aprox.
			Min. ØD1 & ØD2	Max. ØD1 (tipo I) / ØD2 (tipo II)									Min. DBSE "S"	Per Mtr. Extra "S"	Min. DBSE "S"	Per Mtr. Extra "S"	
10	96	7500	10	22	25	54	63	35	30	100 140	160, 200	75	1.3	2.3	0.0006	0.0004	0.021
35	232	7000	12	30	38	54	82	45	40	100 140 180	180, 220, 260	85	2.3	3.2	0.0021	0.0011	0.047
95	618	6000	17	40	50	66	102	57	45		190, 230, 270	95	4.7	6.0	0.0062	0.0017	0.100
170	1204	5200	17	52	70	78	128	77	55		210, 250, 290	110	8.0	7.0	0.0180	0.0047	0.222
220	1912	4800	22	65	80	88	146	94	60		220, 260, 300	120	11.4	8.4	0.0350	0.0088	0.381
400	3463	4400	27	80	100	102	176	115	70		140 180	280, 320	140	19.5	13.1	0.0850	0.021
520	5583	4200	32	90	115	114	197	132	90	140 180 250	320, 360, 430	175	29.3	21.7	0.1678	0.056	0.962
1000	7084	4000	42	105	130	132	225	147	95	180 250 300	330, 370, 440	185	42.1	21.1	0.3098	0.056	1.529
1300	10383	3800	47	115	140	144	250	162	105	180 250 300	390, 460, 510	195	61.0	27.1	0.5328	0.067	1.892
2000	14536	3700	52	120	155	168	275	178	115	180 250 300	410, 480, 530	215	81.7	42.8	0.8610	0.167	2.454
2500	18714	3600	62	135	165	170	300	190	130	180 250 300	440, 510, 560	235	106.9	42.8	1.3580	0.167	3.783

CARACTERÍSTICAS RLMK

Tipo RLMK	Par Nom. Nm	Max. RPM	Agujero			ØA	ØB	L	DBSE "G"	TL (STD DBSE)	M	Peso kg. aprox.	M.I. (MR2) en kg. m ² aprox	Tors. stiff. MNm/rad aprox.	Máxima desalineación	
			Min. ØD1 & ØD2	Max. ØD1 (tipo I) / ØD2 (tipo II)											Axial	Angular
			(mm)	(deg)												
10	96	7500	10	22	25	63	35	30	6.5	66.5	75	0.9	0.00047	0.041	±1	0.75°
35	232	7000	12	30	38	82	45	40	6.5	86.5	85	1.8	0.0017	0.093		
95	618	6000	17	40	50	102	57	45	8	98	95	3.2	0.0082	0.248		
170	1204	5200	17	52	70	128	77	55	9.5	119.5	110	5.8	0.0143	0.248		
220	1912	4800	22	65	80	146	94	60	12	132	120	8.5	0.0263	0.529		
400	3463	4400	27	80	100	176	115	70	13	153	140	14.0	0.0640	0.895		
520	5583	4200	32	90	115	197	132	90	14.4	194.5	175	22.2	0.1320	1.665	±2	CONSULTAR
1000	7084	4000	42	105	130	225	147	95	16.2	206.1	185	30.5	0.2311	2.393		
1300	10383	3800	47	115	140	250	162	105	19.5	229.4	195	42.7	0.3945	3.490		
2000	14536	3700	52	132	155	275	178	115	21.5	251.5	215	57.3	0.6350			
2500	18714	3600	62	147	165	300	190	130	23.5	283.6	235	76.1	1.0050			